


LCD 43" Midrange Large Format Display (with integrated USB-C Interface)

NEC MultiSync® M431 USB-C

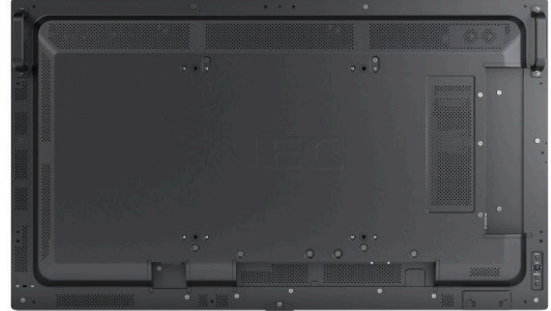

Intuitive professional content delivery

Great first impressions can make all the difference; presenting your business in the best possible way will boost your brand. With slim, modern styling, 24/7 operation and high haze panel to reduce reflections when ambient light is high, the M series is the professional way to deliver your message, yet at an attractive price point.

Designed for seamless collaboration in today's meeting rooms, this display features an USB-C interface for effortless one-cable connection of your laptop, streamlining setup and maximizing productivity.

Benefits

Plug & Play experience with integrated USB-C interface – connect your notebook to the meeting room display and instantly your notebook content will appear on the big screen.

Enhanced imaging performance – advanced settings of all relevant visual parameters allow full control of brightness, colour, gamma and uniformity via the SpectraView Engine for precise, natural images.

Secure remote management – control your devices remotely and securely using NEC NaviSet Administrator 2; proactively manage maintenance requirements saving time and resources

Mission-critical 24/7 ready operation – the meticulous selection of industrial-grade components and careful design focused on demanding usage scenarios accompany an impressive and continuous viewer experience.

Future Ready Connectivity – featuring multiple industry standard digital and analogue signal inputs for flexible integration into AV infrastructures.

Specifications

Product Information

Product Name

NEC MultiSync® M431 USB-C

Product Group

LCD 43" Midrange Large Format Display (with integrated USB-C Interface)

Order Code

60006091

Display

Panel Technology

IPS with Edge LED backlights

Screen Size [inch/cm]

43 / 108

Aspect Ratio

16:9

Brightness [cd/m²]

500

Contrast Ratio

≥ 8000:1¹

Viewing Angle [°]

178 horizontal / 178 vertical (typ. at contrast ratio 10:1)

Colour Depth [bn]

1.076 (10bit)

Response Time (typ.) [ms]

8

Panel Refresh Rate [Hz]

60

Haze Level [%]

Pro (28)

Supported Orientation

Face Up²; Landscape; Portrait

Resolution

Native Resolution

3840 x 2160

Supported Resolutions

1024 x 768;	1400 x 1050;	1920 x 1200;
1280 x 1024;	1440 x 900;	1920 x 2160;
1280 x 720;	1600 x 1200;	3840 x 2160;
1360 x 768;	1650 x 1050;	4096 x 2160
1366 x 768;	1920 x 1080;	

Synchronisation Rate

Horizontal Frequency [kHz]

15 - 136

Vertical Frequency [Hz]

23 - 86

Connectivity

Input Video Digital

1 x DisplayPort (with HDCP); 1 x USB-C (with HDCP, 45 W); 2 x HDMI (with HDCP)

Input Audio Digital

1 x DisplayPort; 2 x HDMI

Input Control

LAN 100Mbit; remote control wire (3,5mm jack); RS232

Input Data

1 x USB 2.0 (Downstream); 1 x USB 2.0 (Powered 5V/2A, Firmware Updates); 1 x USB 2.0 Type-B (Downstream); 1 x USB 3.1 USB Type-C (AV Peripherals); 2 x USB 3.1 Type-A (AV Peripherals)

Output Audio Analogue

1 x 3,5 mm jack

Input Detect

Custom; First; Last

Sensors

Ambient Light Sensor

Integrated, triggered actions programmable

Temperature Sensor

Integrated, 3 sensors, triggered actions programmable

Electrical

Power Consumption [W]

80 shipping

Power Savings Mode [W]

< 0.5; < 2 (Networked Standby)

Power Management

VESA DPMS

Power Supply

100-240 V AC; 50/60 Hz; internal

Environmental Conditions

Operating Temperature [°C]

+0 to +40

Operating Humidity [%]

20 to 80

Storage Humidity [%]

10 to 90

Storage Temperature [°C]

-20 to 60

Mechanical

Dimensions (W x H x D) [mm]

968.2 x 561 x 67.1

Weight [kg]

17.8

Bezel Width [mm]

11 (left, right and top); 15.6 (bottom)

VESA Mounting [mm]

300 x 300 (FDMI); 4 holes; M6

Ingress Protection

IP5x (front); IP2x (back)

Packaging Dimensions (W x H x D) [mm]

1,120 x 700 x 203

Packaging Weight [kg]

23

Colour Bezel

Pantone 426M (black)

Material

Metal

MediaPlayer

Supported File Storage / File System

USB 2.0 / FAT16, FAT32

Supported Image Formats

JPG (baseline, progressive, RGB, CMYK); max. resolution 15360 x 8640

Supported Video Formats

MPG (MPEG1/2/4, max res 1080p@30Hz); MP4 (MPEG2/4, H.263, H.264, HEVC/H.265, max res 3840x2160@60Hz); TS (MPEG2, H.264, HEVC/H.265, max res 3840x2160@60Hz); audio: LPCM, MP3, AAC; WMV (video H.264, Windows Media Video 9, max res 1080p@30Hz, audio WMA 9, WMA 10 Pro)

Supported Audio Formats

MP3 (MP3); max. bit-rate 320 kBit/s

Available Options

Accessories

Feet (ST-43M); Presence Sensor (KT-RC3); Soundbar (active: SP-ASCM-IQ2 / SP-ASCM-2); Speaker (SP-RM3a); Trolley (PD04-Tipster Trolley); Wall mount (PDW S 32-65 L, PDW S 32-65 P)

Regulatory

Safety and Ergonomics

BSMI; CE; EAC; EMC Class B; Energy Star 8; FCC Class B; KC/KCC; PSB; RCM; RoHS; VCCI

Pixel Failure Class

ISO 9241-307, Class 1

Resistance to Fire

Metal backcover, plastic material certified acc. to UL94-5VB

Green Features

Energy Efficiency

Energy consumption: 68 kWh/1000 h; Energy efficiency class: G; LED backlight

Ecological Standards

EnergyStar 8.0

3rd Party Certifications

Crestron

Certified for Crestron Connected

Additional Features

Special Characteristics

DICOM Simulation; HDMI ARC; Powered USB Port (10 W); Removable Logo

Audio

Integrated Speakers (10 W + 10 W)

Shipping Content

2x AAA batteries; Display; HDMI Cable; Power Cable; Remote Control; Setup Manual

Warranty

3 years warranty incl. backlight; additional services available; optional 4. + 5. year warranty extension³

Operating Hours

24/7

External Control

AMX NetLinx Support; ASCII Control Commands; Crestron Connected; HDMI CEC; HTTP Browser; PLink; Scheduled Timer; SNMP

Remote Management

Automated Email Alerts; NaViSet Administrator 2

Security

Disable HW Buttons; Disable IR Functionality; Emergency Notification

¹ out of the box conditions, local dimming ON

² adjusted usage conditions for face up/down installations, please refer to operational guidelines or contact our support

³ please refer to terms and conditions of warranty extensions



VCCI



CE



FCC Class B



RoHS



RCM

This document is © 2026 Sharp Display Solutions Europe GmbH.

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 08.03.2026